NEMA Locking Devices

Locking Devices for the Entire Spectrum of Industrial Applications

Leviton's industrial grade locking devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of locking devices of unmatched flexibility and dependability.

Exposed Connector

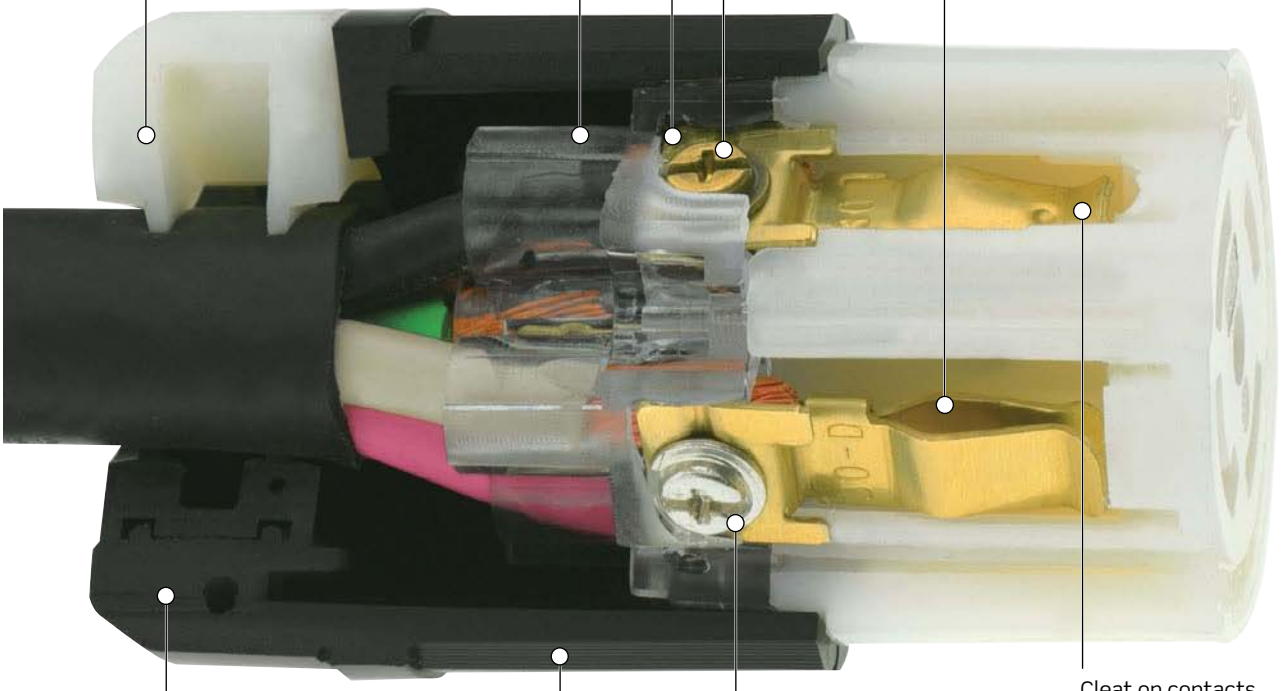

Exposed Plug

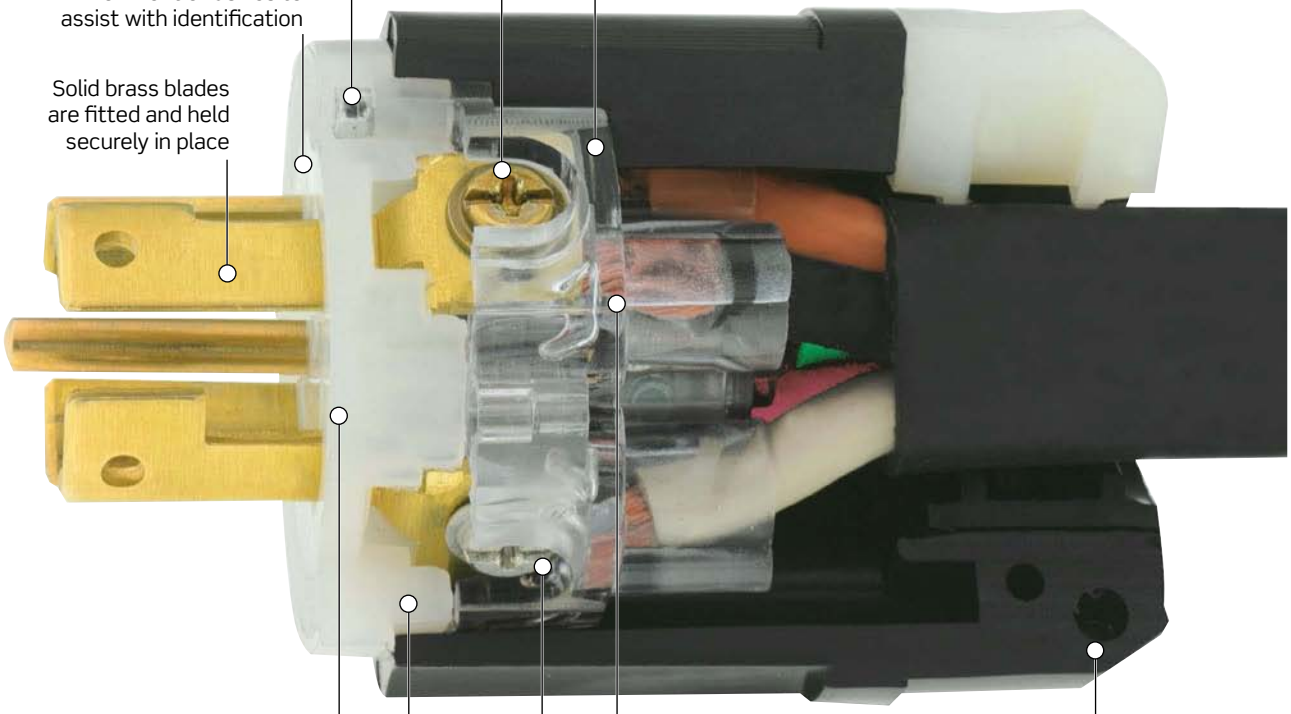

Shrouded pockets in cord clamp prevents slippage of screwdriver blade when tightening clamp screws.

Wire clamps move within individual chambers to provide positive clamp lock without cutting wire strands.

Captive terminal screws eliminate nuisance dropping and searching for missing screws.

Deep-funnelled, large wire wells guide conductors into termination position.

Locking Flush Receptacles

Engineered for maximum performance with a UL 94 V-0 flammability rating.

V-O-MAX®

Sample Receptacles

- Extra thick .050" nickel-plated brass mounting strap
- Stamped-in agency certifications
- Molded-in amperage and voltage rating
- NEMA configuration
- Color-coded voltage rating
- Manufacturer
- Stability ribs
- Uni-body face
- Triple combination head mounting screws

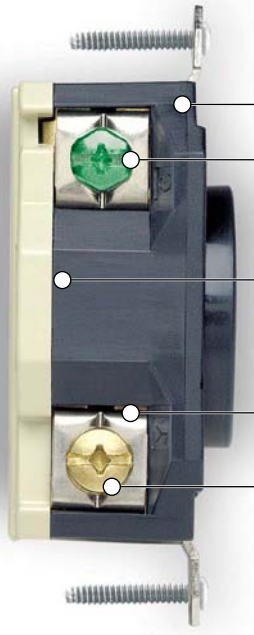

- Molded-in terminal identification letters
- Triple combination mounting screws, multi-terminated design, accepts #8 to #14 solid or stranded conductors
- Seam between front cover and back cover is far from contact working area
- External nickel plated clamps accept #8 to #14 solid or stranded conductors for back and side wiring
- Oversized #10 brass Phillips/Robertson/ straight slot drive terminal screw

V-O-MAX®
FLUSH RECEPTACLES–UL V-0 RATING

Color-Coded Voltage Ratings			
125V	250V	277VAC	
125/250V	3ø250V	3ø480V	600V

One-piece .040" thick brass, high-copper content contacts with nickel-plated clamp type terminals

Contacts deeply seated in thick walled faced





Mechanically-secured all-brass ground path

Industrial Grade Black & White® Locking Devices

15A-125V, 250V and 277VAC

2-Pole, 3-Wire Grounding UL CSA

Rating	15A-125V		15A-250V		15A-277VAC	
NEMA	L5-15P	L5-15R	L6-15P	L6-15R	L7-15P	L7-15R
Description	**Cat. No.**	**Cat. No.**	**Cat. No.**	**Cat. No.**	**Cat. No.**	**Cat. No.**
Plugs and Connectors	**Plug**	**Connector**	**Plug**	**Connector**	**Plug**	**Connector**
Black & White® Nylon Body	4720-C	4729-C	4570-C	4579-C	4770-C	4779-C
All Black Nylon Body	4720-CB	4729-CB	—	4579-B	4770-B	4779-B
Yellow Nylon Body	4720-CY	4729-CY	4570-CY	4579-CY	4770-CY	4779-CY
Power Indication™ Black & White® Nylon Body	4720-PLC	4729-PLC	4570-PLC	4579-PLC	4770-PLC	4779-PLC
Angle Locking Black & White® Nylon Body	4720-CA	—	4570-CA	—	4770-CA	—
Inlets and Outlets	**Inlet**	**Outlet**	**Inlet**	**Outlet**	**Inlet**	**Outlet**
Flanged Device	4716-C	4715-C	4586-C	4585-C	4786-C	4785-C
Receptacles						
Duplex Flush Receptacle, Self Grounding, Back and Side Wired	—	4700	—	4550	—	4750
Duplex Flush Receptacle, Isolated Ground, Back and Side Wired, 6" Green Ground Lead	—	4700-IG	—	4550-IG	—	4750-IG
Duplex Flush Receptacle w/2 Hot Feeds and 1 Neutral Return, Self Grounding, Back and Side Wired	—	4702-IIR	—	—	—	—
Duplex Flush Receptacle w/Split Feed — 2 Hot Feeds and 2 Neutral Returns, Self Grounding, Back and Side Wired	—	4703-IIR	—	—	—	—
Single Flush Receptacle	—	4710	—	4560	—	4760
Single Flush Receptacle, w/Short Strap	—	4710-SS	—	—	—	—
Single Flush Receptacle, Isolated Ground	—	4710-IG	—	4560-IG	—	4760-IG

4716-C

4560-IG

4700

Wallplates and Covers

302 Stainless Steel Single Receptacle	302 Stainless Steel Duplex Receptacle	Weatherproof Cover with Self Closing Lid for Flanged Inlets and Outlets*		
1.41" Dia. Opening		1.72" Dia. Opening, IP64, NEMA 3R — Includes Screws and Pre-assembled Gasket		
84004-40	84003-40	WP1-G	WP1-EB	WP1-YL

*For use with 15A Locking devices

Related Products
For more information on Weather-Resistant Boots for Locking Plugs and Connectors **see page F-20.**
Find the right wallplate for any application. **See section R for Wallplates & Covers.**